




PIPE TYPE BEFOREHAND INSULATING TERMINAL



Trusted name in automation.

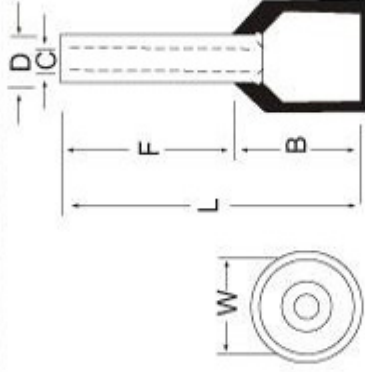

Pipe type beforehand insulating terminal Maximum compression resistance:105°C 300 VOLTS MAX.
The material of the terminal:tinning red copper pipe Insulating bushing:nylon

Electrical wire scope	Type	Diameter						Colour	The tool mode for impression and connection
		F mm	L mm	W mm	B mm	D mm	C mm		
10 A.W.G. 6.0mm ²	E6012	12.0	20.5	6.0	8.5	3.9	3.5	Green Black	CEF-16WF Using the 6.0-caliber tongs
	E6018	18.0	26.5						
	E10-12 E10-18	12.0	20.8	7.5	8.8	4.9	4.5	Brown Ivory	CEF-16WF Using the 10-caliber tongs
		18.0	26.8						
6 A.W.G. 16mm ²	E16-12	12.0	22.0	8.7	10.0	6.2	5.8	Ivory Green	CEF-16WF Using the 16-caliber tongs
	E16-18	18.0	28.0						
	E25-12	12.0	24.0						
	E25-15	15.0	27.0						
4 A.W.G. 25mm ²	E25-16	16.0	28.0	11.0	12.0	7.9	7.5	Black Yellow	KST2000N Using the 25-caliber tongs
	E25-18	18.0	30.0						
	E25-22	22.0	34.0						
	E35-16	16.0	30.0						
2 A.W.G. 35mm ²	E35-18	18.0	32.0	12.5	14.0	8.7	8.3	Red Ivory	KST2000N Using the 35-caliber tongs
	E35-22	22.0	36.0						
	E35-25	25.0	39.0						
	E50-12	12.0	28.0						
1/0 A.W.G. 50mm ²	E50-20	20.0	36.0	15.0	16.0	10.9	10.3	Blue Green	KST2000P Using the 50-caliber tongs
	E50-25	25.0	42.0	16.0	17.0	14.3	13.5	Yellow Yellow	
	E70-27	27.0	44.0						
	E95-25	25.0	44.0	18.5	19.0	16.3	14.5	Red Blue Blue	
3/0 A.W.G. 95mm ²	E120-27	27.0	47.6	20.3	20.6	17.5	16.5	Blue Blue	
	E120-32	32.0	52.6						
	E150-25	25.0	50.6						
	E150-27	27.0	52.6	23.4	25.6	20.6	19.6	Yellow Yellow	
250/300MCM A.W.G. 150mm ²	E150-32	32.0	57.6						

CRIMPING TOOLS

CAT.NO.

Product Photo

WIRE RANGE FOR CRIMPING

IDC8 6-4



6mm²-16mm²

WELL CONTACTS CO

56, Pushpak Cascade Swathi Road, Shanthinagar, Bengaluru -560 027.

Tel-080 22226675, 22206675, 41169654 FAX-080 22226675

Email: wcblore_2007@yahoo.com, wellcontacts@yahoo.com