



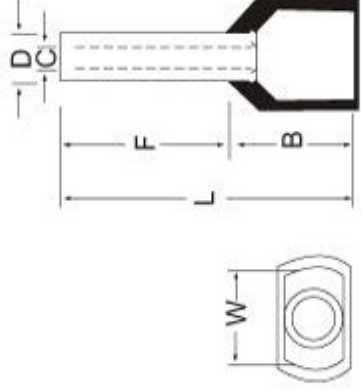

BEFOREHAND INSULATING TERMINAL WITH DOUBLE-WIRE INSERT

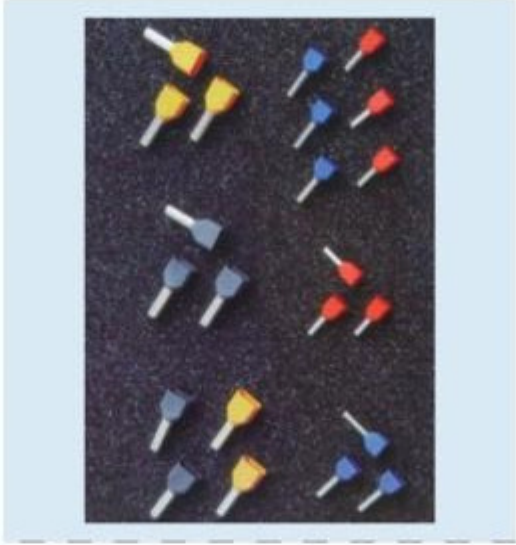

Beforehand insulating terminal with double-wire inser
Maximum compression resistance:105°C 300 VOLTS MAX.
The material of the terminal:tinning red copper pipe Insulating bushing:nylon

Electrical wire scope	Type	Diameter						Colour	The tool mode for impression and connection
		F mm	L mm	W mm	B mm	D mm	C mm		
2X22 A.W.G. 2X0.5mm ²	TE0508	8.0	14.5	5.0	3.6	1.8	1.5	White Orange	
2X20 A.W.G. 2X0.75mm ²	TE7508	8.0	14.5	5.5	3.6	2.1	1.8	Blue White	
2X18 A.W.G. 2X1.0mm ²	TE1008	8.0	15.1	5.5	4.0	2.3	2.0	Red Yellow	
2X16 A.W.G. 2X1.5mm ²	TE1508	8.0	15.5	6.4	4.2	2.6	2.3	Black Red	
2X14 A.W.G. 2X2.5mm ²	TE2510	10.0	18.5	8.0	5.0	3.3	2.9	Gray Blue	
2X12 A.W.G. 2X4mm ²	TE2513	13.0	21.5	8.8	5.7	4.2	3.8	Orange Gray	
2X10 A.W.G. 2X6mm ²	TE4012	14.0	26.1	9.5	6.8	5.3	4.9	Green Black	
2X8 A.W.G. 2X10mm ²	TE10-14	14.0	26.6	12.6	8.0	6.9	6.5	Palm Ivory	
2X6 A.W.G. 2X16mm ²	TE16-14	14.0	31.3	19.0	10.5	8.7	8.3	Ivory Green	

WELL CONTACTS CO

56, "Pushpak Cascade" Swathi Road, Shanthinagar, Bengaluru -560 077.

Tel-080 77776675, 77706675, 41169654 FAX-080 77776675

Email: wcblore_2007@yahoo.com, wellcontacts@yahoo.com