



## NYLON CABLE GLAND




Material: Made from UL Nylon 66, 94V-2 and tight ring is from rubber.

Feature: 1. Special designation, good strength sile and none damage to electrical machine.

2. No need to disorganization the fix terminal, cable can be inserted through directly then tighten easy and save time.

Application: Used for machinery control box, distribution plate, machine and electrical etc.

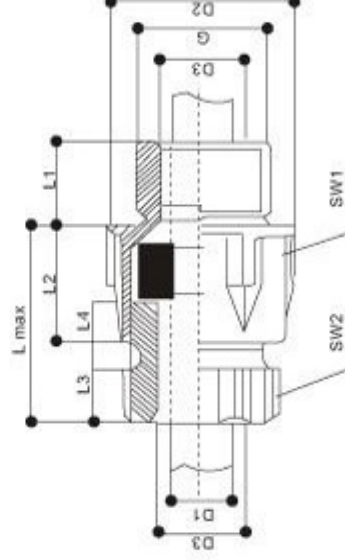

Type	Thread length L1	Entry range D1	Thread width D2	Cable nle size L-L1	Lock nut size D3
PG-07	8	3.5-3.6	7	23-8	16.5
PG-09	8	4.5-7	10.2	25-8	21.5
PG-11	8	5.5-10	11.5	27-8	25
PG-13.5	9	9-13	13.5	28-9	27
PG-16	10	10-14	16.5	30-10	30
PG-19	10	14-18	30	10-12	28
PG-21	11	14-18	21	38-11	37.5
PG-25	11	18-25	25	13-18	36
PG-29	11	18-25	27.5	42-11	47.5
PG-36	12	25-33	34.5	43-12	58
PG-42	13	30-38	40.5	48-13	65
PG-48	14	37-44	45.5	48-14	70
PG-63	27	42-50	60	13-18	36

Type	Thread metric	Cable range φ	Thread O.D.C1	Panel mounting size	Thread length C2	Sealing nut size F	Lock nut size A
MG-12	M12X1.25	7.6-4.6	12	12.5	8.5	19	18
MG-14	M14X1.25	7.6-4.6	14	14.5	8.5	20	19
MG-16	M16X1.5	10-6	16	16.5	15	22	22
MG-18	M18X1.5	10-6	18	18.5	15	25	22
MG-20	M20X1.5	14-9	20	20.5	15	27	27
MG-24	M24X1.5	14-9	24	24.5	15	33	27
MG-25	M25X1.5	18-13	25	25.5	15	33	33
MG-27	M27X1.5	18-13	27	27.5	15	35	35
MG-32	M32X1.5	25-18	32	33	15	41	41
MG-36	M36X1.5	25-18	36	36.5	20	45	41
MG-40	M40X1.5	30-24	40	41	20	50	50
MG-50	M50X1.5	39-30	50	51	22	62	61
MG-63	M63X1.5	48.5-40	63	64	25	75	75

## WELL CONTACTS CO

# 56, "Pushpak Cascade" Swathi Road, Shantinagar, Bengaluru -560 077.

Tel-080 27226675, 27206675, 41169654 FAX-080 27226675

Email: wellcore\_2007@yahoo.com, wellcontacts@yahoo.com