


## Φ 16 PUSH-BUTTON SWITCHES

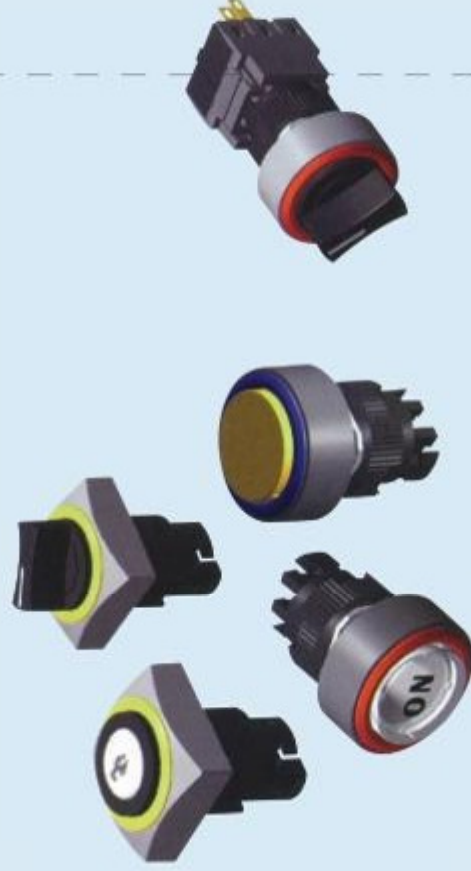

### Model description

Company symbol 

#### Products series

M16: push button, selector push-button switch, key-operated push-button switch, emergency stop push-button switch and indicator lamp, all of them diameter is 16mm.

#### Operation category

- 1: Push button
- 2: Selector push-button 2 segments
- 3: Selector push-button 3 segments
- 4: Key-operated push-button 2 segments
- 5: Key-operated push-button 3 segments
- 6: Indicator lamp

Note: The operation angle of selector push button and key-operated push button is 90°

#### Head shape

- 1: Round
- 2: Square

#### Operation way

- W: No operation  
F: Auto-reset  
S: Auto-lock  
Z: Mixture operation(reset on the left and lock on the right)  
Y: Mixture operation(reset on the right and lock on the left)  
Note: mixture operation is applicable for selector push button 3 segments and key-operated push button 3 segments

The color of operation part and key withdrawn position

| Code | Head color | Code | Key withdrawn position  |
|------|------------|------|---|
| R    | Red        | 1    |  |
| G    | Green      | 2    |  |
| Y    | Yellow     | 3    |  |
| W    | White      | 4    |  |
| B    | Blue       | 5    |  |
| K    | Black*     | 6    |  |
|      |            | 7    |  |

Note: \* Not applicable for luminescence type

#### Color of chromatic circle

- B: Blue  
G: Green  
O: Orange  
P: Purple  
R: Red  
T: Subtransparent  
W: White  
Y: Yellow

#### Protection class

- B: Standard(IP40)  
F: Dustproof, waterproof, oil-proof(IP65)

#### Type with lamp and voltage

- W: No lamp  
L: LED lamp 24VDC(standard)  
M: LED lamp 12VDC  
N: LED lamp 6VDC

#### Contact structure

- O: No contact  
1: Single-throw(1NO+1NC)  
2: Double-throw(2NO+2NC)  
3: Triple--throw(3NO+3NC)

## WELL CONTACTS CO

# 56, "Pushpak Cascade" Swathi Road, Shanthinagar, Bengaluru -560 077.

Tel-080 22226675, 22206675, 41169654 FAX-080 22226675

Email: wcblore\_2007@yahoo.com, wellcontacts@yahoo.com