


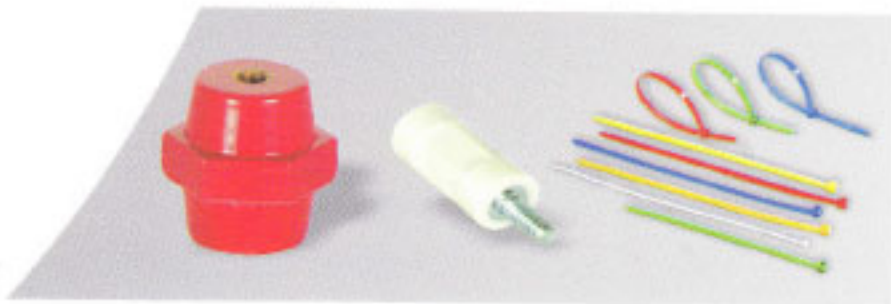


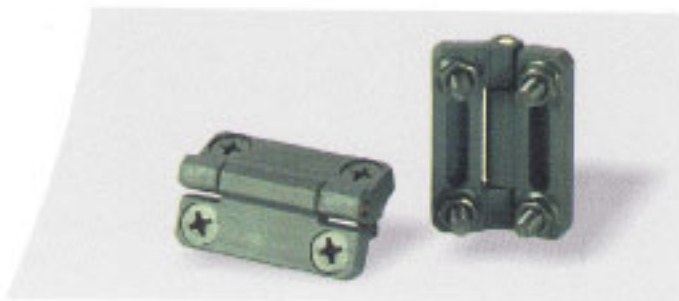

flu - con enterprises

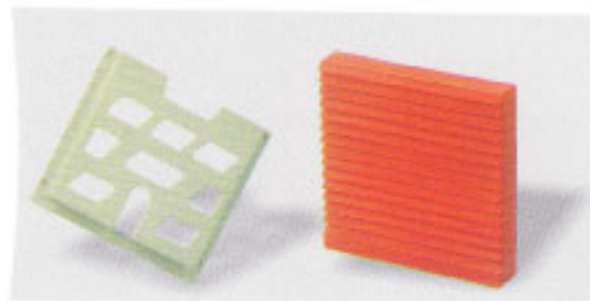

Powering
Your
Imagination

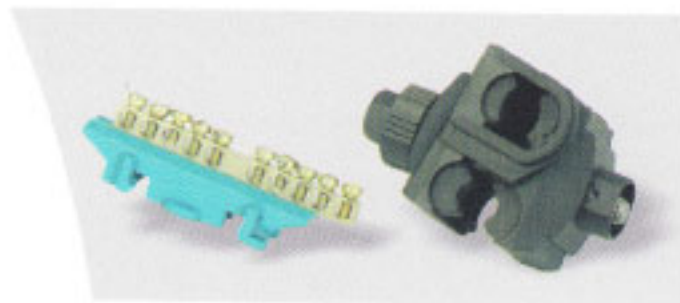

www.fluconenterprises.com



CORPORATE OFFICE



FINISHING DEPARTMENT



MACHINE SHOP



MACHINE SHOP

Company Profile

Flu-con enterprises founded in the year 1972 in the name of "Nylo-plast" by Mr. F.B Pinto who was a pioneer in the field of Industrial polymers such as nylon at the inception of materials such as nylon which were just being introduced in the industry in India. He had started the company on its growth trajectory in terms of dedication and superior quality to each and every product manufactured and sold at flu-con enterprises.

Today the same Flu-con enterprises is being run and managed by young professionals who believe and work keeping in mind the values of its founder to take the company to ever greater heights and to fulfill the vision of our founder. We are currently an ISO 9001-2008 certified organization holding certification of RvA Holland and certified by Intertek. We are also in the process of product certifications for various products in conformation to industrial standards.

Flu-con enterprises is today catering to domestic market with sound dealer network in all states .We are also in the international market catering to countries in Europe where stringent environment rules are in force such as "ROHS" and "REACH" and also to South East Asian market, Latin America, North America and Africa.

Flu-con enterprises is mainly involved in the manufacture and delivery of effective engineering products mainly for electrical & switchgear industry, machinery and equipment manufacture, measuring and control panel.

Flu-con enterprises is well equipped to produce articles and components in the range of 5gms to 1200gms with a varied range of quality machinery from L&T Chennai to chen-de China. We are equipped with in house tool & die machine shop maintained and operated by qualified personnel committed to quality.

Quality policy:

We at flu-con enterprises strive to provide cost effective component that matchup to internationally acknowledged quality norms and quicker turnaround time so as to make the products cost effective.

We have maintained consistency in our product quality through standardized work practice and appropriate investment in technology.

Improvement in quality at all levels and customer satisfaction is the motto of our management.


On going in employee a



PG Threaded Nylon Flexible Cable glands in Metric & PG Standards.

Technical Specification:

Body : Polyamide 6
 Sealing: EPDM
 Temp : Static 40 c + 100 c
 Dynamic 20 c + 80 c
 Protection Class - I.P 67 - 5 bar
 Colour : Grey, White & Black

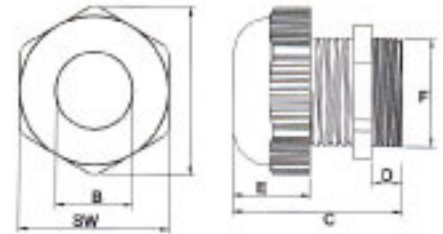

Sr.No.	Cable Range (in mm)	Part No.	SW	A	B	C		D	E	Ø F	Packing
						Min.	Max.				
1.	2.5 - 6.5	FC -7	15	16.25	7.25	32	20.75	7.5	12	12.4	100
2.	3.5 - 8	FC -9	18.75	21	9	35.75	30.5	8.25	16.25	14.8	100
3.	4 - 10	FC -11	21.5	24	11	38.5	32.25	8.25	17	18.3	100
4.	5 - 12	FC -13.5	23.75	28.5	12.75	37.75	32.25	9	17.5	20	100
5.	9 - 14	FC -16	26.75	29.5	14.5	42.5	37	10	18.75	22.5	100
6.	13 - 18	FC -21	32.5	35.5	18.5	49.5	42	11	22	28.5	100
7.	14 - 25	FC -29	43	47	27	54.5	43	11	27.5	36.65	50
8.	19 - 32	FC -36	59	59	33	66	55	13	31	47	5
9.	28 - 40	FC -42	60	65	40	70	66	18	33	60	5
10.	32 - 44	FC -48	65	74	40	72	67	21	38	71.5	5



MM Threaded Nylon Flexible Cable Glands.

Sr.No.	Cable Range (in mm)	Part No.	SW	A	C		D	E	Ø F	Packing
					Max.	Min.				
1.	2.5 - 6.5	FC M12x1.5	15	16.75	32	28	7.5	7.5	12	25
2.	3.5 - 8	FCM16x1.5	18.75	21	36	30.5	8.25	16.25	16	25
3.	5 - 12	FCM20x1.5	21.5	24	38.5	32	8.25	17	20	25
4.	9 - 14	FCM25x1.5	23.75	26.5	38	32	9	17.5	22	25
5.	13 - 18	FC M32x1.5	26.75	29.5	38	32	9	17.5	32	25
6.	14 - 25	FCM40x1.5	43	47	27	55	43	11	41	10
7.	19 - 32	FC M50x1.5	59	59	33	66	55	13	51	5

- FC Cable glands are made of polyamide 6.0 ideally suited to guarantee optimum conditions for impact resistance and full insulation
- Effective gripping is provided on tightening of caps, which ensure that complete strain relief is provided to your cables.
- Specially provided groove on internal part of the cap nut acts as a ratchet, which provides self locking and vibration resistant fixing.
- Easy mounting of cable glands is provided for introducing cables and conductors in to machines.
- Secure and fast connection in various industries ranging from machinery and equipment manufacture, measuring and control electronic, automation, electrical and robotics.


Spiral Cable Glands in METRIC & PG Threads.

Cat. No : FC-SCG-01

Colour : Grey/Black



Sr.No.	Part No.	A	B	A/F	Packing
1.	FC - 7	47	7.5	15	25 Nos.
2.	FC - 9	56	8.25	18.75	25 Nos.
3.	FC - 11	67	8.25	21.5	25 Nos.
4.	FC - 13.6	74	9	23.75	25 Nos.
5.	FC - 18	87	10	26.75	25 Nos.
6.	FC - 21	105	11	32.5	25 Nos.
7.	SM 12 x 1.5	47	7.5	15	25 Nos.
8.	SM 16 x 1.5	56	8.25	18.75	25 Nos.
9.	SM 20 x 1.5	74	9	23.75	25 Nos.
10.	SM 25 x 1.5	87	10	26.75	25 Nos.
11.	SM 32 x 1.5	105	11	32.5	25 Nos.

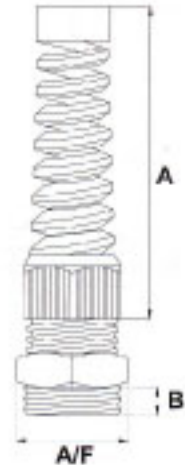

- FC-SCG Cable glands have all features of standard PG Thread Cable Glands with an added cable support to prevent damage and kinks in the cable.

Nylon Straight Cable Glands

Cat. No: FC-NSCG-01

Technical Specification:

Body : Polymide 6

Sealing Washer :PVC

Temp : Static - 20 c +80 c


Dynamic - 10 c +60 c

Protection Class - Open

Colour : Black only

Item Contents -> Body, Cap, Nut, PVC Washer.

Sr.No.	Part No.	Min. C	Max. C	D	Lock Nut E	Ø F	Packing
1.	FCST - 16	35	33	11	5	14	25
2.	FCST - 20	37	35	11	5	17.5	25
3.	FCST - 25	37.5	35	11	5	24	25
4.	FCST - 32	40	37.5	11	5	30	25

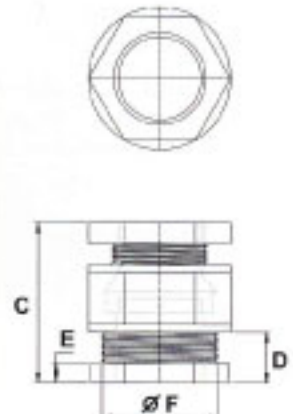

Dual Purpose Steel Reinforced Pipe Glands.

Cat. No : FC-SRPG-01

Colour : Grey, Black

Sr.No.	Part No.	Suitable, Inner dia. of hose in mm	Standard Packing
1.	SRPG - 9	10	25 Nos.
2.	SRPG - 11	10	25 Nos.
3.	SRPG - 13.5	15	25 Nos.
4.	SRPG - 16	20	25 Nos.
5.	SRPG - 21	25	25 Nos.
6.	SRPG - 29	30	10 Nos.
7.	SRPG - 36	40	5 Nos.
8.	SRPG - 42	50	5 Nos.
9.	SRPG - M16 x 1.5	10	25 Nos.
10.	SRPG - M20 x 1.5	15	25 Nos.
11.	SRPG - M25 x 1.5	20	25 Nos.
12.	SRPG - M32 x 1.5	25	25 Nos.



Technical Details:

- FC SRPG glands are specially designed for effective gripping & strain relief for your cables.
- FC SRPG glands provide liquid & dust tight fitting internally & SRP hose provides effective protection for the cable from external damages.
- FC SRPG glands are provided with din standad PG threads & mm threads.



Blanking Plug in Metric & PG Threads.


Cat : No. FC-BP-01

Material : Polyamide.

Available in Black & Grey Colour

Protection : IP - 54 /

IP 68 with rubber 'O' ring.



Sr.No.	Part No.	A	B	Sr.No.	Part No.	A	B
1.	FC - BP - 7	6	8	10.	FC - BP - 48	12	16
2.	FC - BP - 9	6	9	11.	BP - M12 x 1.5	6	10
3.	FC - BP - 11	9.5	9	12.	BP - M16 x 1.5	7	11.5
4.	FC - BP - 13.5	9.5	9.5	13.	BP - M20 x 1.5	7	9.5
5.	FC - BP - 16	9.5	9.5	14.	BP - M25 x 1.5	11	15.5
6.	FC - BP - 21	11	11	15.	BP - M32 x 1.5	11	18
7.	FC - BP - 29	12	12	16.	BP - M40 x 1.5	13	18
8.	FC - BP - 36	15	15	17.	BP - M50 x 1.5	13	18.5
9.	FC - BP - 42	16	16	18.	BP - M63 x 1.5	15	19




LOCK NUTS in Metric & PG Threads.

Cat. No. : FC - LN - 01

Material : Polyamide 6.

Available in Black & Grey Colour

Compatible with FC Cable Glands & Blanking Plugs.

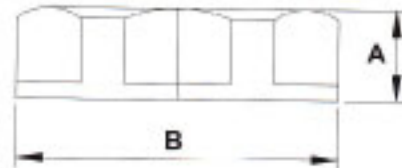

Sr.No.	Part No.	A	B	Threading TPI	Sr.No.	Part No.	A	B	Threading mm
1.	FC - LN - 7	5.2	17.8	11	11.	LN - M12 x 1.5	5.0	17.85	M12x1.5
2.	FC - LN - 9	5.2	24.5	11	12.	LN - M16 x 1.5	5.1	24.3	M16x1.5
3.	FC - LN - 11	5.2	26.5	18	13.	LN - M20 x 1.5	6.1	30.0	M20x1.5
4.	FC - LN - 13.5	6.1	29.5	18	14.	LN - M25 x 1.5	6.15	33.6	M25x1.5
5.	FC - LN - 16	6.2	33.5	18	15.	LN - M32 x 1.5	7.3	39.9	M32x1.5
6.	FC - LN - 21	7	39	16	16.	LN - M40 x 1.5	8	48	M40x1.5
7.	FC - LN - 29	7	50.5	16	17.	LN - M50 x 1.5	8	58	M50x1.5
8.	FC - LN - 36	8	67	16	18.	LN - M63 x 1.5	9.5	78	M63x1.5
9.	FC - LN - 42	8	66	18					
10.	FC - LN - 48	9.5	78.66	18					



Rubber & PVC Grommets and clousers

Cat. No. FC-GB-01

Material : Rubber EPDM.

Material : Plastic PVC HRC 60 - 65. (Soft)

Suitable for 2 mm, 2.5 mm & 3 mm Sheet.

CAT. No.	Sheet Hole Diameter	
	Inches	mm
FCGB 2	3/8"	9.5
FCGB 3	1/2"	12.5
FCGB 4	5/8"	15.5
FCGB 5	3/4"	19.0
FCGB 6	7/8"	22.0
FCGB 7	1"	25.0
FCGB 8	1 1/8"	32.0
FCGB 9	1 1/4"	38.0
FCGB 10	2"	50.0



Flexible Conduit Pipe Gland Suitable for Flexible Conduit Hose.

Product No. FC - CP -01

CP glands are available in mm threads.

CP glands are manufactured in PPCP material and are crack resistant.


Specially designed teeth for effective gripping and sealing of conduit pipes.

Conduit Pipe glands are ideally suited for use where a number of wires are to be passed through a single panel port or machine part.

Available Black and Grey and White Colours.

Material : PP. Also Available in ABS.

Sr.No.	Part No.	Pipe Size	Pipe Size ID	Pipe Size OD	C	Ø F	Packing
1.	CP - 16	12	11	16	30	15.5	25 Nos.
2.	CP - 20	16	15	20	31	18.5	25 Nos.
3.	CP - 25	20	19	25	37	23.5	25 Nos.
4.	CP - 32	25	25	32	40	30.5	25 Nos.
5.	CP - 40	32	32	40	40	38	25 Nos.
6.	CP - 50	40	40	50	41	49	25 Nos.

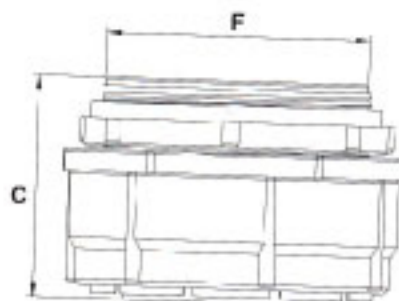

Quick coupling flexible conduit gland suitable for flexible conduit pipe.

Product No: FCQCP-01

Material : Polyamide 6

Colour : Black/Grey.

IP Rating : IP 55

Sr.No.	Part No.	Pipe Size	Pipe Size Min.	Pipe Size Max.	Packing
1.	FCQCP - 16	12	11	16	25 Nos.
2.	FCQCP - 20	16	15	21	25 Nos.
3.	FCQCP - 22	21	19	25	25 Nos.
4.	FCQCP - 32	25	25	32	25 Nos.



Single compression cable gland

Product No: FCSCG-01

Material : Body ABS, Sealing ring and Washer EPDM, Compression ring steel.

Colour : Grey. RAL 7032.

IP Rating : IP 55

Sr.No.	Part No.	Threading	Cable Range Min.	Cable Range Max.	Packing
1.	FCSCG - 20	M20x1.5	5	12	25 Nos.
2.	FCSCG - 25	M25x1.5	9	14	25 Nos.
3.	FCSCG - 32	M32x1.5	13	18	25 Nos.
4.	FCSCG - 40	M40x1.5	17	25	25 Nos.





Self Locking Nylon Cable Ties.

Material: Nylon 6.6 UL Certified 94V-2

Operating Temperature: Static +12-20 Dynamic +140-40

Colour :

Manufactured & Tested as per international standard "IEC62275 FOR CABLE MANAGEMENT SYSTEM

Product Code	L		Bundle Dia. MM	Min. Loop Tensile Strength		Packing Per Packet 100 Nos.	Min. Packing Per Carton Pkt
	IN	MM		lbs	Kgs		
FC-100 x 2.5	4	100	2-22	22	10	100	600
FC-150 x 3.6	6	150	2-35	44	20	100	230
FC-200 x 3.6	8	200	3-50	44	20	100	170
FC-250 x 4.8	10	250	3-65	50	23	100	120
FC-300 x 4.8	12	300	3-82	50	23	100	100
FC-368 x 4.8	14.5	368	3-100	50	23	100	90
FC-450 x 4.8	18	450	3-130	50	23	100	80



Mains Cord Tie, FCMCT-01



Self Adhesive Tie mounts.

Cat. No. FCSW-01

Sr.No.	Part No.	Size.	
		L	W
1.	FCTM -19	19	19
2.	FCTM - 25	25	25



Screw Mounting tie Support

Cat. No. FCSMS-01

Sr.No.	Part No.	Max. Suitable Tie Width
1.	FCSMS-12	5 mm
2.	FCSMS-19	10 mm



Self Adhesive Wire Support

Cat. No. FCSWS -01

Sr.No.	Part No.	Max. Suitable Wire Dia.
1.	FCSWS-01	8 mm


Spiral Wire Bind.

Product Code:- FCSWB-01

Material:- LDPE

Operating Temperature: - -5 +80

Spiral Wire Bind are Suitable for bunching of loose wire and Cable.




Product Code	ID	OD	SP	Bundle Range in mm	Std Packing Per Bundle
SB06	4	6	7	4-50	10 Mtrs.
SB08	6	8	10.8	6-60	
SB10	7.5	10	11.4	7.5-60	
SB12	9	12	13.9	9-65	
SB15	12	15	15	12-75	
SB19	15	19	18.3	15-100	
SB24	20	24	19.6	20-130	






Product Code: FCDK-01

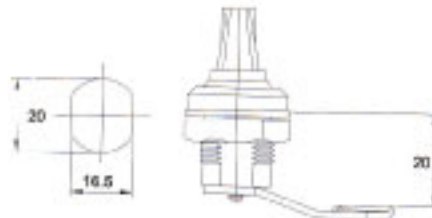

Product Code: FCDK-02

**Control Panel Door Knobs with Metal Lever Length 50mm & 25mm Suitable height 20mm.
Material: Polyamide.**

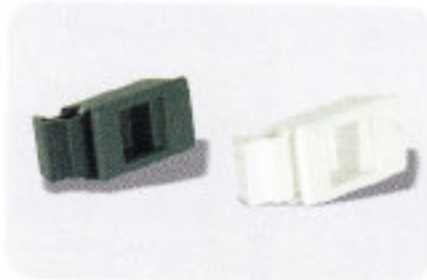

Product Code: FCSL-01

**Snap Latch
Material: Polyamide.
Colour : Black/Grey.**




Product Code: FCSK-01

**6mm Square Key
Material: Polyamide.
Colour : Black/Grey.**



Product Code: FCDK-03

**Wing Knob.
Material: Polyamide.
Colour : Black/Grey.**

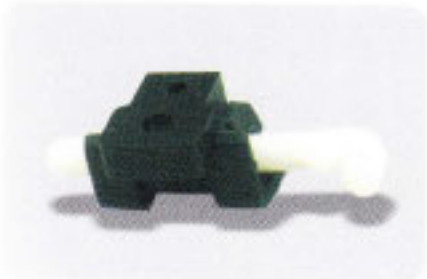


Product Code: FCHI-01

**180° Hinge for 2mm Sheet.
Material: Polyamide Body, Delrin Pin
Colour : Black**



Product Code: FCHI-02

**Pin Hinge.
Material: Polyamide 6.6
Colour : Black/Natural.**

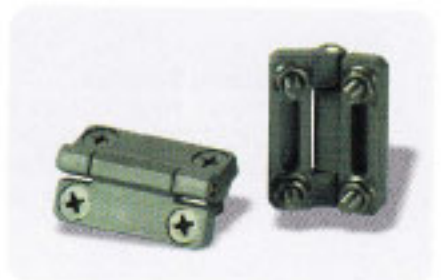

Product Code: FCHI-03

**50mm Flat Hinge with
Mounting Screw.
Material: Polyamide.
Colour : Black.**



Product Code: FC-DLH-01

**Door Label Holder
Material: PC
Colour : Transparent**



Product Code: FC-MCU-01

**MCU Hinges
Material: ABS
Colour : Light Grey**



Product Code: FC-DLH-02

**Door Label Holder
Material: PC
Colour : Transparent**

Meter Viewing Window (Inspection Window)

FLU CON Range of Inspection Windows are produced from quality raw materials confirming to international standard and specifications.

All windows are IP 64 rated and are in UV protective raw material for PC.

Product Code:- FCMWG-04

Cut Out Size:- 92x92 mm
Available Viewing Area:- 90x90 mm
Material :- PC/SAN
IP Protection Gasket :- EPDM




Product Code:- FCMWG-01

Cut Out Size:- 90x130 mm
Available Viewing Area:- 86x126 mm
Material :- PC/SAN
IP Protection Gasket :- EPDM



Product Code:- FCMWG-02

Cut Out Size:- 120x160mm
Available Viewing Area:- 116x156 mm
Material :- PC/SAN
IP Protection Gasket :- EPDM

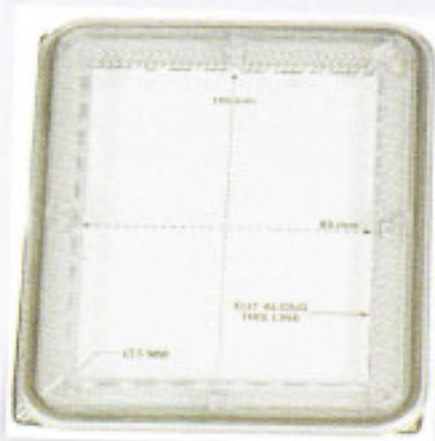

Product Code:- FCMWG-03

Cut Out Size:- 206x206 mm
Available Viewing Area:- 200x200 mm
Material :- PC/SAN
IP Protection Gasket :- EPDM





Meter Viewing Window (Inspection Window)

**FLU CON Range of Inspection Windows are produced from quality raw materials conforming to international standard and specifications.
All windows are IP 64 rated and are in UV protective raw material for PC.**

Product Code:- FCUWG-96x96

Cut Out Size:- 92x92 mm

Available Viewing Area:- 90x90 mm

Material :- PC

IP Protection Gasket :- EPDM

IP Protection Class:- IP 66

Snap Fit also provided for additional screw fitting.

Suitable for 1.5 and 2 mm Sheet.

Snap mounts
1.5mm 4 Nos.
2mm 4 Nos.



Screw mount
4 Nos.



Product Code:- FCHWG-200x200

Cut Out Size:- 157x157 mm

Available Viewing Area:- 150x150 mm

Material :- PC

IP Protection Gasket :- EPDM

IP Protection Class:- IP 66



Air Vent Surface Mounted with Screw Fitting.

Product Description : Ventilators with washable filters compatible with panel fans.


Material : ABS

Colour : Grey/Black

Seal gasket : Sponge EVA.

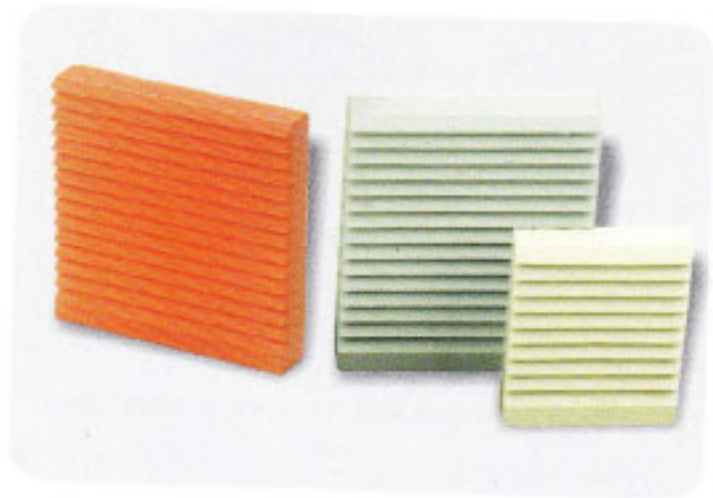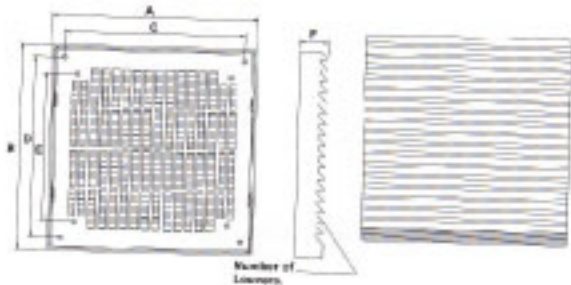

Product Code.	Air Vent	A	B	C	D	E	F	Number of Louvers	Fan Compatibility
FCAV-04	90x90	90	90	71	71	N/A	17	9	3 Inches
FCAV-01	130x130	130	130	105	105	96	22	14	4 Inches
FCAV-02	184x184	184	184	155	155	N/A	24	15	6 Inches
FCAV-03	238x238	238	238	185	185	213x213	35	19	8 Inches

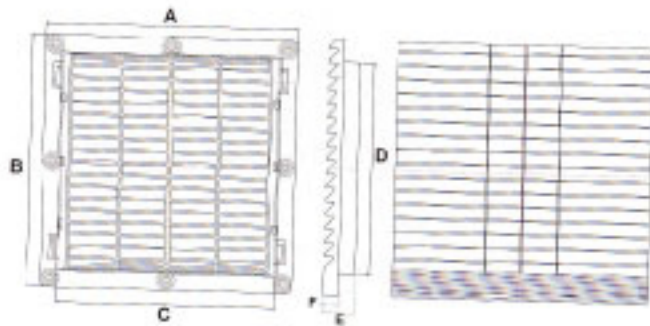

Air Vent Flush Mounted with Sanp fit

Product Description : Ventilators with washable filters.

Material : ABS

Colour : Grey/Black

Seal gasket : Sponge EVA.

Product Code.	Air Vent	A	B	E	F	Number of Louvers	Cut out Size		Std. Pkg
							C	D	
FCAV-01S	147x147	147	147	23.5	14.5	15	122.5	122.5	25
FCAV-02S	203x203	203	203	31	19	16	176	178	25
FCAV-03S	255x255	255	255	31	19	19	223	223	10
FCAV-04S	325x325	325	325	32	19	25	292	292	5




Air vent 96x96

Product Code:- FCPFG-01

Material :- ABS

Colour:- Black/Grey RAL 7035

Snap Fit also provided for additional screw fitting.

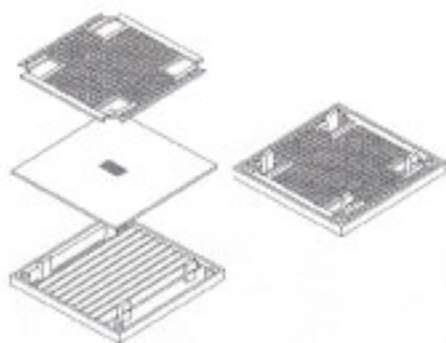

Product Code:- FCPFG-01


Document Holder.

Product Code:- FCDOC-001


Material :- ABS

Colour:- Black/Grey RAL 7035


Fitting :- Provided With self adhesive foam tape

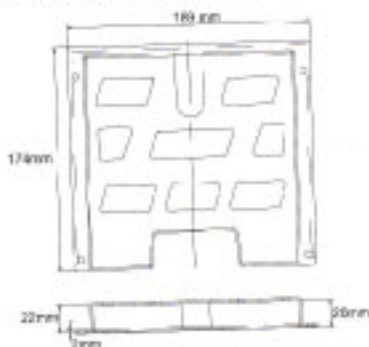

Product Code:- FCDOC-01

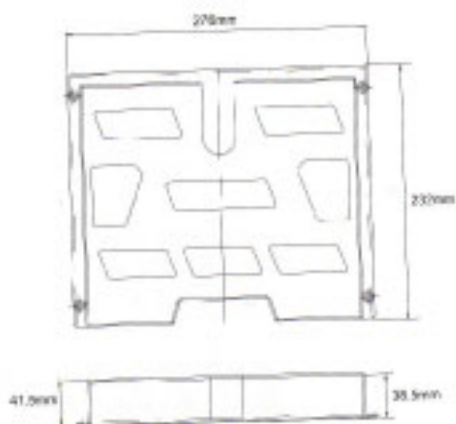

Product Code:- FCDOC-02

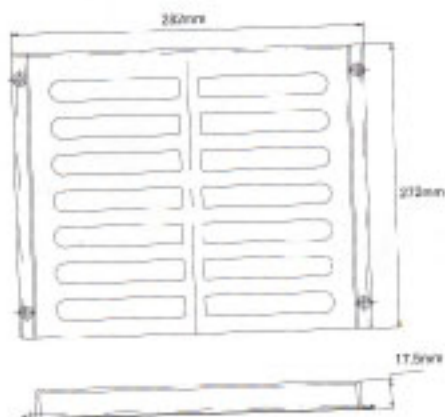


Product Code:- FCDOC-03

MCB Blanker Suitable for Blank Cut out in Control Panel and DB Box.

Product Type : single Module, 4 Module, 5 Module, 12 Module.

Material : ABS/HIPS

Colour : Grey ral 7032 & Ral 7035.

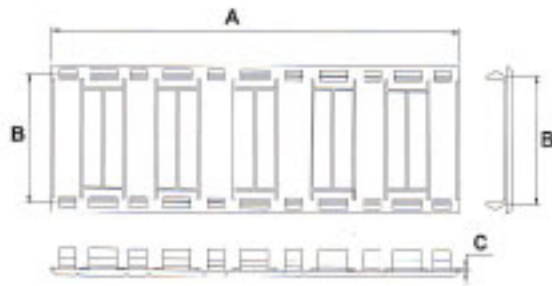

Product Code.	A	B	Sheet Size C	Cut out Size
FC5WB-146	146mm	45.5mm	1.5 to 2 mm	46x142mm
FC5WB-144	146mm	4.5mm	1.5 to 2 mm	45x142mm
FC4B-246	73mm	45.5mm	1.5 to 2 mm	46x68mm
FC12WB-246	216mm	45.5mm	1.5 to 2 mm	46x210mm

FC5WB-146
FC5WB-144

FC4B-246

FC12WB-246


MCB Blanker Suitable for Blank Cut out in Control Panel and DB Box.

Product Code:-FC1WB-01

Product Type : single Module,

Material : ABS/HIPS

Colour : Grey ral 7032 & Ral 7035.

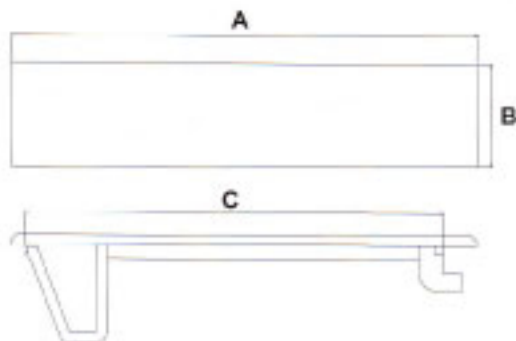

Product Code.	A	B	C	Sheet Size	Cut out Size
FC1WB-1850	54 mm	18 mm	50 mm	1.5 to 2 mm	50x17mm
FC1WB-1360	65 mm	13mm	60 mm	1.5 to 2 mm	60x12mm
FC1WB-2560	65 mm	25mm	60 mm	1.5 to 2 mm	60x24mm

FC1WB-1850
FC1WB-1360
FC1WB-2560



Plastic Dust Protection Cap.



Sr. No.	Size Male/Female				
	MM	BSP	UNF	NPT	
1.	M8x1	M22x1.5x35	1/8	7/16	1/8
2.	M10x1	M24x1.5	1/4	1/2	1/4
3.	M10x1.5	M26x1.5	3/8	9/16	3/8
4.	M12x1	M30x1.5	1/2	3/4	1/2
5.	M12x1.5	M30x2	5/8	7/8	3/4
6.	M14x1.5	M35x1.5	3/4	1 1/16	1
7.	M16x1.5	M36x1.5	1	1 5/16	1 1/4
8.	M18x1.5	M36x2	1 1/4		1 1/2
9.	M20x1.5	M45x2	1 1/2		
10.	M22x1.5	M52x2	2		
11.			2 1/2		

Product Code: FC DC-01

Material :- Virgin LDPE

Colour :- Red

Plastic Dust Caps are mainly used in Hydraulic and Pneumatic Industry.



Pin Type.


Insulated Comb Bus Bar.

Product Code: FCICB-01


Material :- Conductor Cu. Insulation-PVC (ROHS)

Colour :- Light Grey

Sizes Available Single Pole, 2 Pole, 3 Pole, 4 Pole. Pin & Fork Type.

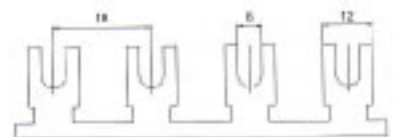

Fork Type.

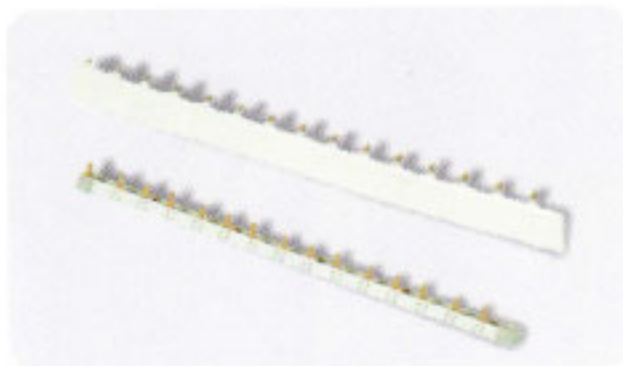

Insulation Piercing Connector For Insulated ABC Cable.

Product Code: FCIPC-01

Material :- Conductor Cu. Body-Polyamide 66.

Colour :- Black

Main line:- 25-95, Branch line- 2.5-25

Max. Current: - 160 Amps.

Single Shear Bolt.



DYLO GRIP Brand Rawal Plug


Product Code: FC DG-01

Material :- Polymer.

Colour :- Grey & White.

Pull Load Tested.

Sr. No.	Item No.	Length	Drill Size		Punch Size	Screw Size
			mm	Inch		
1.	DG 8x25	25 mm	4.7	3/16	8 No.	6/8
2.	DG 8x35	35 mm	4.7	3/16	8 No.	6/8
3.	DG 10x30	25 mm	6.3	1/4	10No.	8/10
4.	DG 10x45	45 mm	6.3	1/4	10No.	8/10
5.	GT 8x25	28 mm	4.7	3/16	8 No.	6/8
6.	GT 10x30	30 mm	6.3	1/4	10No.	8/10
7.	DG12x50	50 mm	7.9	5/16	12 No.	12
8.	GT 12x50	50 mm	7.9	5/16	12 No.	12
9.	DG 14x80	80 mm	12.7	1/2	14 No.	14
10.	GT 14x80	80 mm	12.7	1/2	14 No.	14

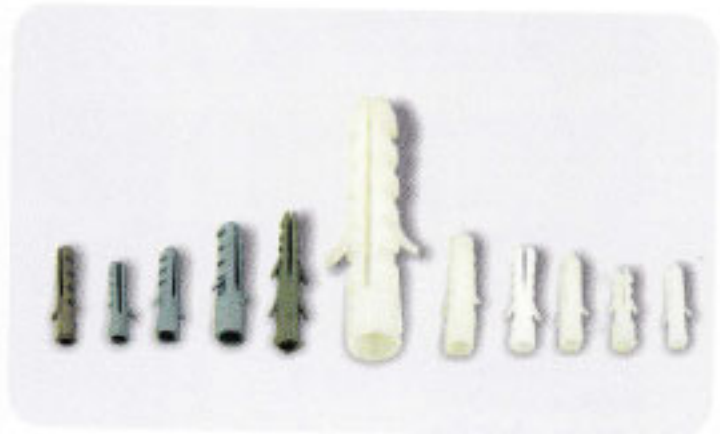

Nylon Soft Blow Hammer

Product Code: FCSBH-01

Material :- Toughened Nylon 6.

Also Available Spare Tips Separatly.

Product Code	Hammer Size	
	mm	Inches
FCH-01	25	1
FCH-02	32	1 1/4
FCH-03	38	1 1/2
FC-04	45	1 3/4
FC-05	50	2



Meter Box.

Product Code: FCMB-01

Material :- ABS FR

Colour :- Light Grey

Sizes :- 457x250x197 mm (LxBxH)

Suitable for Indoor application only.



Product Code: FCMB-01



Product Code: FCMB-01



Switch Gear Housing



Customised Electronic Case



FLEXIBLE CABLE GLANDS



CONTROL PANEL ACCESSORIES



**DYLO-GRIP BRAND
PVC RAWAL PLUG**



NEUTRAL LINK & BASES



**PVC / RUBBER GROMMETS &
CLOSURES**



PNEUMATIC CONNECTIONS



STRAIGHT CABLE GLANDS



INSULATED COMB BUS BAR



NEUTRAL BREAKS & CONNECTORS



SPACERS & INSULATORS



HOLE BLANKING PLUG



**CUSTOMISED PLASTIC
HOUSING & PRODUCTS**



**NYLON FACED SOFT BLOW
HAMMERS**



DOCUMENT HOLDER & AIR VENTS



**METER INSPECTION
WINDOW GLASS**





WE MANUFACTURE :

- PROTECTIVE CAPS
- NYLON CABLE GLANDS
- NYLON CABLE TIES
- SPACERS & INSULATORS
- FLEXIBLE CONDUIT PIPE GLANDS
- PLASTIC BUSHES
- PANEL BOARD ACCESSORIES
- CUSTOMISED INDUSTRIAL PLASTIC PRODUCTS



A-20, Nand Dham Industrial Estate, Marol Maroshi Road,
Andheri (East), Mumbai - 400 059. Tel : +91-22-2920 2071 / 4026 1818
Mobile : +91 9323318780 / +91 9321329928 Fax : +91-22-2920 0217
Email : fluconenterprises@gmail.com / flucon@vsnl.net
Skype Calling : flucon1
website : www.fluconenterprises.com

AUTHORISED DISTRIBUTOR

